

# Broadcast International CORP

## Broadband Power Splitter

### Características Electromecánicas



#### GENERAL FEATURES

**Frequency bands:** RADIO FM - TV VHF - TV UHF

**Number of output:** 2 - 3 - 4 - 5 - 6 - 8

**Input connectors:** N - 7/16 - 7/8" - 1+5/8" - 3+1/8"  
- 4+1/8" - 6+1/8"

**Output connectors:** N - 7/16 - 7/8" - 1+5/8" - 3+1/8"  
- 4+1/2"

**V.S.W.R.:**  $\leq 1.08:1$

**Impedance:** 50 ohm

**Insertion loss:** 0.1 dB


**Moisture protection:** power splitters with EIA flanges are pressurizable

**Mounting:** couple of mounting brackets (optionals)  
for poles  $\phi 30$  to  $\phi 114$  mm

**Materials:** Welded brass and copper - Bolts in st. steel  
- Teflon insulators - Silicon O-Rings

**Treatments:** Treated and painted body - Silver-plated  
maching line

V.S.W.R.

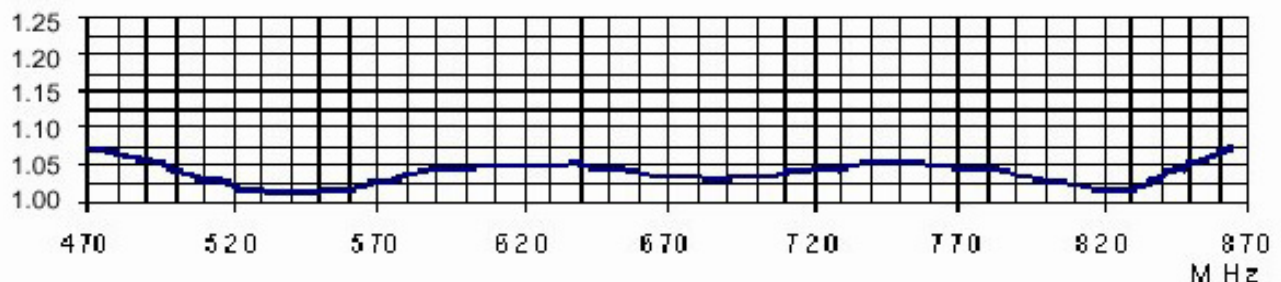

Modificaciones están sujetas a cambio sin aviso.